




## IMPORTED BEARING OF AMERICA CORP.

17 mm x 30 mm x 7 mm 17 mm x 30 mm x 7 mm NTN 6903ZZ deep groove ball bearings

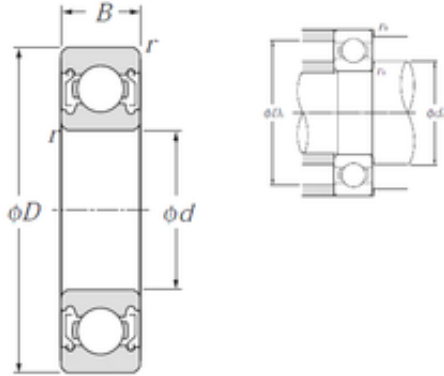

Bearing No. 6903ZZ

6903ZZ Bearing 2D drawings and 3D CAD models

Size	17x30x7 mm
Bore Diameter	17 mm
Outer Diameter	30 mm
Width	7 mm
d	17 mm
D	30 mm
B	7 mm
C	7 mm
rn	0,3 mm
r min.	0,3 mm
da min.	19 mm
da max	20 mm
Da max.	28 mm
ra max.	0,3 mm
Weight	0,018 Kg
Basic dynamic load rating (C)	4,65 kN
Basic static load rating (C0)	2,58 kN
(Grease) Lubrication Speed	22 000 r/min
Category	Single Row Ball Bearings
Inventory	0.0
Manufacturer Name	NTN
Minimum Buy Quantity	N/A
Weight / Kilogram	0.018
EAN	4547359006629
Product Group	B00308



## IMPORTED BEARING OF AMERICA CORP.

Enclosure	2 Metal Shields
Precision Class	ABEC 1   ISO P0
Maximum Capacity / Filling Slot	No
Rolling Element	Ball Bearing
Snap Ring	No
Internal Special Features	No
Cage Material	Steel
Internal Clearance	C0-Medium
Inch - Metric	Metric
Long Description	17MM Bore; 30MM Outside Diameter; 7MM Outer Race Diameter; 2 Metal Shields; Ball Bearing; ABEC 1   ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features
Category	Single Row Ball Bearing
UNSPSC	31171504
Harmonized Tariff Code	8482.10.50.68
Noun	Bearing
Keyword String	Ball
Manufacturer URL	<a href="http://www.ntnamerica.com">http://www.ntnamerica.com</a>
Manufacturer Item Number	6903JRXZZ/2AS
Weight / LBS	0.037
Outside Diameter	1.181 Inch   30 Millimeter
Outer Race Width	0.276 Inch   7 Millimeter
Bore	0.669 Inch   17 Millimeter
Other Features	Deep Groove   Shell Alvania Prelubricated
Inner Race Width	0 Inch   0 Millimeter
bore diameter:	17 mm
precision rating:	ISO Class 0
outside diameter:	30 mm



## IMPORTED BEARING OF AMERICA CORP.

finish/coating:	Uncoated
overall width:	7 mm
bearing material:	High Carbon Chrome Steel
bore type:	Round
cage material:	Steel
closure type:	Double Shielded
inner ring width:	7 mm
row type & fill slot:	Single Row Non-Fill Slot
outer ring width:	7 mm
snap ring included:	Without Snap Ring
maximum rpm (grease):	22000 rpm
internal clearance:	CN
fillet radius:	0.3 mm
operating temperature range:	-40 to 120 ° C
maximum rpm:	22000 RPM
dynamic load capacity:	4650 N
series:	69
static load capacity:	2580 N
manufacturer product page:	<a href="#">Click here</a>